
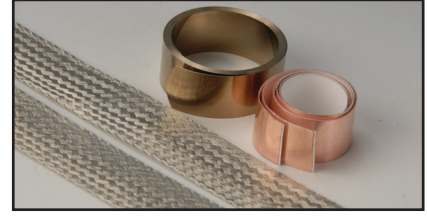
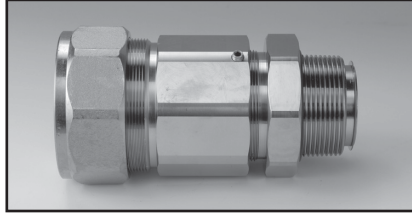


# SERVICEDRIVE® SYSTEM SELECTION GUIDE

## Armored Cable

Corresponding HP and Part Numbers

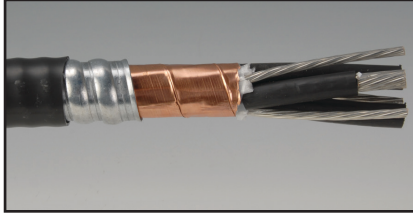

### 600 Volt Copper

CABLE Part Number	CONNECTOR Part Number	TERMINATION KIT Part Number	Size (AWG or Kcmil)	230V 3ø	460V 3ø	575V 3ø
VFDAP14/3	CONASD14/3	TERASD14-1/3	14	5 HP	10 HP	10 HP
VFDAP12/3	CONASD12/3	TERASD14-1/3	12	5 HP	10 HP	15 HP
VFDAP10/3	CONASD10/3	TERASD14-1/3	10	10 HP	20 HP	25 HP
VFDAP8/3	CONASD8/3	TERASD14-1/3	8	10 HP	30 HP	30 HP
VFDAP6/3	CONASD6/3	TERASD14-1/3	6	15 HP	40 HP	50 HP
VFDAP4/3	CONASD4/3	TERASD14-1/3	4	25 HP	50 HP	60 HP
VFDAP3/3	CONASD3/3	TERASD14-1/3	3	30 HP	60 HP	75 HP
VFDAP2/3	CONASD2/3	TERASD14-1/3	2	30 HP	60 HP	75 HP
VFDAP1/3	CONASD1/3	TERASD14-1/3	1	40 HP	75 HP	100 HP
VFDAP1/03	CONASD1/03	TERASD1/0-3/03	1/0	40 HP	75 HP	100 HP
VFDAP2/03	CONASD2/03	TERASD1/0-3/03	2/0	50 HP	100 HP	125 HP
VFDAP3/03	CONASD3/03	TERASD1/0-3/03	3/0	60 HP	125 HP	150 HP
VFDAP4/03	CONASD4/03	TERASD4/0-400/3	4/0	60 HP	150 HP	150 HP
VFDAP250/3	CONASD250/3	TERASD4/0-400/3	250	75 HP	150 HP	200 HP
VFDAP350/3	CONASD350/3	TERASD4/0-400/3	350	100 HP	200 HP	250 HP
VFDAP500/3	CONASD500/3	TERASD500-750/3	500	100 HP	250 HP	300 HP
VFDAP600/3	CONASD600/3	TERASD500-750/3	600	125 HP	250 HP	350 HP
VFDAP750/3	CONASD750/3	TERASD500-750/3	750	150 HP	300 HP	350 HP