


BARE COPPER



PLATER WIRE

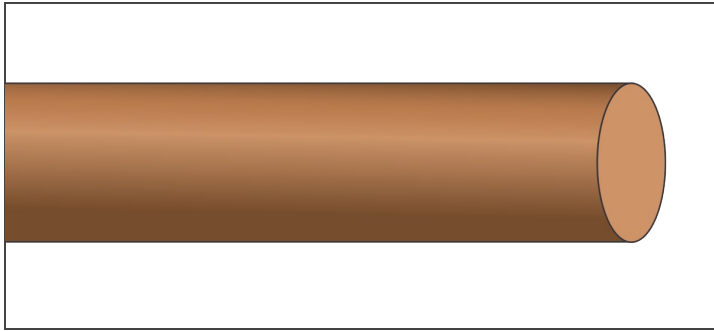

Description:

Solid soft drawn or hard drawn bare copper.
Packaged on convenient spools (per ASTM B49).

Soft Drawn: Easily formed into place.

Hard Drawn: Higher tensile strength. Retains shape. More difficult to form.

Application:

Suitable for use as a hanger in the electro-plating industry. Highest conductivity per unit area of all commercially available metals used to conduct electricity. Easily welded and soldered.

Standards:

ASTM Standards: B-1 (*hard drawn*), B-3 (*soft or annealed*), B-49 (*copper rod*)

RoHS Compliant

| Part Number | Solid Conductor (AWG) | Approximate (ft./lb.) | Standard Put-up Per Carton | Standard Packaging | Weight (lb./1000') |
|-------------|--------------------------|--------------------------|----------------------------|--------------------|-----------------------|
| PLATER24 | 24 | 818 | 6 x 10 lb. Spools | 60 | 1.2 |
| PLATER22 | 22 | 514 | 6 x 10 lb. Spools | 60 | 1.9 |
| PLATER20 | 20 | 323 | 6 x 10 lb. Spools | 60 | 3.1 |
| PLATER18 | 18 | 203 | 6 x 10 lb. Spools | 60 | 4.9 |
| PLATER16 | 16 | 128 | 6 x 10 lb. Spools | 60 | 7.8 |
| PLATER14 | 14 | 81 | 2 x 25 lb. Spools | 50 | 12.4 |
| PLATER12 | 12 | 51 | 2 x 25 lb. Spools | 50 | 19.8 |
| PLATER10 | 10 | 32 | 2 x 25 lb. Spools | 50 | 31.4 |
| PLATER8 | 8 | 20 | 2 x 25 lb. Spools | 50 | 50.0 |
| PLATER6 | 6 | 13 | 2 x 25 lb. Spools | 50 | 79.4 |
| PLATER4 | 4 | 8 | 2 x 25 lb. Spools | 50 | 126.3 |
| PLATER2 | 2 | 5 | 2 x 25 lb. Spools | 50 | 200.9 |

NOTE: The data shown is approximate and subject to standard industry tolerances.