


SERVICEDRIVE®

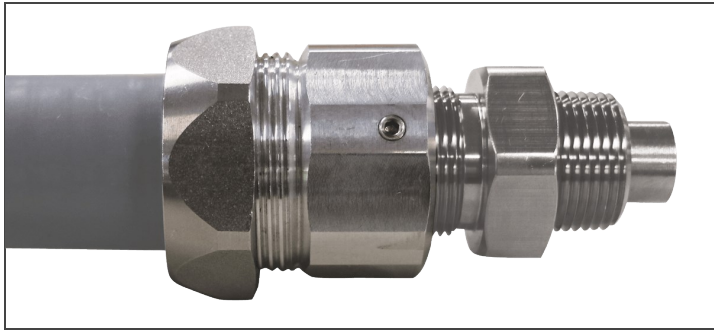

## VFD TERMINATING CONNECTOR

### Liquidtight (Tray)

1,000 Volt Copper



#### Description:

Patented connectors for liquidtight installations are designed exclusively to terminate VFD tray cables in control centers, panel boards, junction boxes, motors, and motor control enclosures. *Compatible with liquidtight conduit.*

#### Application:

\*Patented for use with ServiceDrive® Cable Systems

#### Standards:

Hazardous Locations: Class I (Div 2) and Class II/III (all Divisions)  
NEMA 4  
IP65  
Thread Type: NPT

\*U.S. Patent No. 11,018,447

Part Number	3 Conductor Wire Size (AWG or Kcmil)	Hub Size	Liquidtight Conduit Size	Set Screw Size
CONASDTC2K14/3LT	14	3/4"	1"	10/32 x 1/4"
CONASDTC2K12/3LT	12	3/4"	1"	10/32 x 1/4"
CONASDTC2K10/3LT	10	3/4"	1"	10/32 x 1/4"
CONASDTC2K8/3LT	8	3/4"	1-1/4"	10/32 x 1/4"
CONASDTC2K6/3LT	6	1"	1-1/4"	1/4-20 x 5/16"
CONASDTC2K4/3LT	4	1-1/4"	1-1/2"	1/4-20 x 5/16"
CONASDTC2K3/3LT	3	1-1/4"	1-1/2"	1/4-20 x 5/16"
CONASDTC2K2/3LT	2	1-1/4"	2"	1/4-20 x 5/16"
CONASDTC2K1/3LT	1	1-1/2"	2"	1/4-20 x 5/16"
CONASDTC2K1/03LT	1/0	1-1/2"	2"	1/4-20 x 5/16"
CONASDTC2K2/03LT	2/0	1-1/2"	2"	1/4-20 x 5/16"
CONASDTC2K3/03LT	3/0	1-1/2"	2-1/2"	5/16-18 x 3/8"
CONASDTC2K4/03LT	4/0	2"	2-1/2"	5/16-18 x 3/8"
CONASDTC2K250/3LT	250	2"	3"	5/16-18 x 3/8"
CONASDTC2K300/3LT	300	2"	3"	5/16-18 x 3/8"
CONASDTC2K350/3LT	350	2"	3"	5/16-18 x 3/8"
CONASDTC2K400/3LT	400	2-1/2"	3-1/2"	5/16-18 x 3/8"
CONASDTC2K500/3LT	500	2-1/2"	4"	5/16-18 x 3/8"
CONASDTC2K600/3LT	600	3"	4"	5/16-18 x 3/8"
CONASDTC2K750/3LT	750	3"	4"	5/16-18 x 3/8"