


ARMORED CABLES



SERVICETECK® (TECK90) Connector

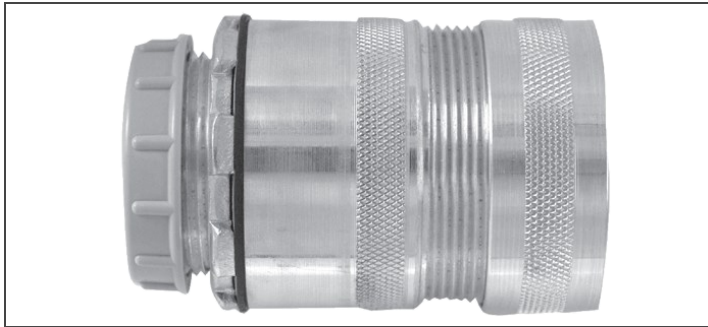

Description:

Connectors are a one-piece body construction with a unique scroll design that provides a 360° ground to armor.

Application:

Suitable for industrial and commercial use. Manufactured from 6061 copper-free aluminum. A complete range of NPT (*National Pipe Thread*) sizes are available from 0.5" through 4" to accommodate armored cable type MC O.D. sizes from 0.38" through 4.33".

Standards:

Hazardous Locations: Class I (*Div 2*) and Class II/III (*all Divisions*)
IP Rating: WT Type 6P/IP68

Item	Part Number	O.D. Range	Item	Part Number	O.D. Range	Item	Part Number	O.D. Range
PAAP14/2	CONW62	0.560 - 0.620	PAAP10/4	CONW83	0.760 - 0.830	PAAP500/3	CONW246	2.350 - 2.460
PAAP14/3	CONW69	0.620 - 0.690	PAAP10/5	CONW83	0.760 - 0.830	PAAP600/3	CONW271	2.570 - 2.710
PAAP14/4	CONW69	0.620 - 0.690	PAAP10/7	CONW97	0.900 - 0.970	PAAP750/3	CONW299	2.850 - 2.990
PAAP14/5	CONW76	0.690 - 0.760	PAAP10/9	CONW104	0.970 - 1.040	PAAP8/4	CONW97	0.900 - 0.970
PAAP14/7	CONW83	0.760 - 0.830	PAAP10/12	CONW111	1.040 - 1.110	PAAP6/4	CONW104	0.970 - 1.040
PAAP14/9	CONW90	0.830 - 0.900	PAAP10/19	CONW132	1.250 - 1.320	PAAP4/4	CONW118	1.110 - 1.180
PAAP14/12	CONW97	0.900 - 0.970	PAAP8/3	CONW90	0.830 - 0.900	PAAP3/4	CONW125	1.180 - 1.250
PAAP14/19	CONW104	0.970 - 1.040	PAAP6/3	CONW104	0.970 - 1.040	PAAP2/4	CONW139	1.320 - 1.390
PAAP12/2	CONW69	0.620 - 0.690	PAAP4/3	CONW111	1.040 - 1.110	PAAP1/4	CONW148	1.390 - 1.480
PAAP12/3	CONW69	0.620 - 0.690	PAAP3/3	CONW111	1.040 - 1.110	PAAP1/04	CONW157	1.480 - 1.570
PAAP12/4	CONW76	0.690 - 0.760	PAAP2/3	CONW125	1.180 - 1.250	PAAP2/04	CONW166	1.570 - 1.660
PAAP12/5	CONW76	0.690 - 0.760	PAAP1/3	CONW139	1.320 - 1.390	PAAP3/04	CONW184	1.750 - 1.840
PAAP12/7	CONW90	0.830 - 0.900	PAAP1/03	CONW148	1.390 - 1.480	PAAP4/04	CONW202	1.840 - 2.020
PAAP12/9	CONW97	0.900 - 0.970	PAAP2/03	CONW157	1.480 - 1.570	PAAP250/4	CONW213	2.020 - 2.130
PAAP12/12	CONW104	0.970 - 1.040	PAAP3/03	CONW166	1.570 - 1.660	PAAP350/4	CONW235	2.240 - 2.350
PAAP12/19	CONW118	1.110 - 1.180	PAAP4/03	CONW175	1.660 - 1.750	PAAP500/4	CONW271	2.570 - 2.710
PAAP10/2	CONW76	0.690 - 0.760	PAAP250/3	CONW193	1.840 - 1.930	PAAP600/4	CONW299	2.850 - 2.990
PAAP10/3	CONW76	0.690 - 0.760	PAAP350/3	CONW213	2.020 - 2.130	PAAP750/4	CONW313	2.990 - 3.130