


## IRRIGATION CABLES

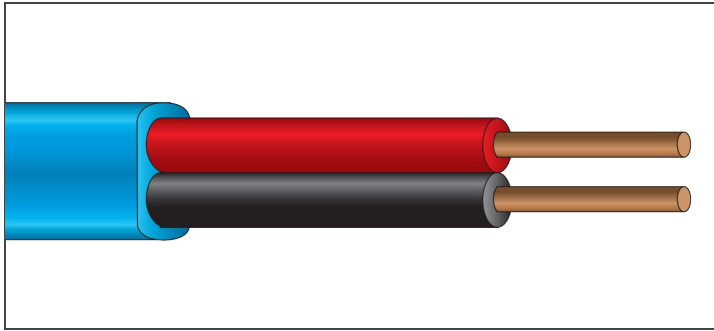

## DECODER CONTROL

UF or TWU/HD-PE

Copper



### Description:

Two solid copper conductors, insulated with 60 mils of flame retardant PVC. Cable jacketed with moisture resistant HD-PE jacket in various colors with jacket rip cord.

### Application:

Suitable for use in irrigation control circuits.

### Standards:

UL 493 (*conductors*)  
 ICEA S-61-402/NEMA WC-5  
 Sunlight Resistant  
 Direct Burial  
 Color Code: Black and Red  
 RoHS Compliant

Part Number	Conductors (no.)	Strands (no.)	Insulation Thickness (mils)	Jacket Thickness (mils)	Diameter (in.)	Approx. Net Weight (lb./1000')
DEC 14/2	2	1	60	35	0.25 x 0.44	72
DEC 12/2	2	1	60	35	0.27 x 0.47	92

NOTE: The data shown is approximate and subject to standard industry tolerances.