


## IRRIGATION CABLES

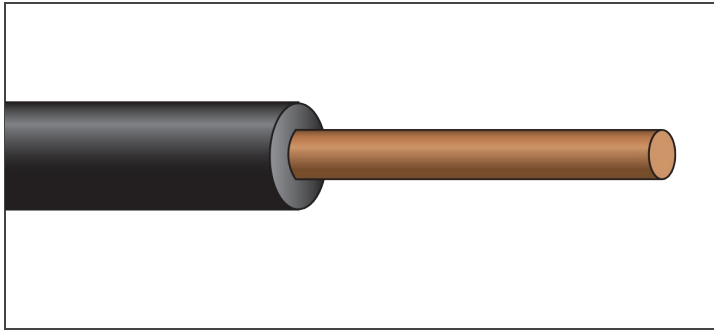

## UNDERGROUND FEEDER

### Golf Course Sprinkler - PE

600 Volt Copper



### Description:

Solid annealed copper conductor insulated with polyethylene.

### Application:

Suitable for use as sprinkler irrigation control wire for general purpose lighting, power, and control conductors for irrigation systems. For use in accordance per NEC Article 340.

### Standards:

UL 493  
 UL Type ULECC  
 Temperature Rated at 75°C Wet/Dry  
 Cold Temperature Rated at -40°C  
 Sunlight Resistant, Gasoline and Oil Resistant  
 Direct Burial  
 RoHS Compliant

Part Number	Conductor (AWG)	Dimensions Insulation (in.)	Dimensions O.D. (in.)	Standard Packaging (2500')	Weight (lb./1000')
GOLF14	14 (sol)	0.045	0.15	X	19
GOLF12	12 (sol)	0.045	0.17	X	27
GOLF10	10 (sol)	0.045	0.19	X	44

*NOTE: The data shown is approximate and subject to standard industry tolerances.*