


IRRIGATION CABLES

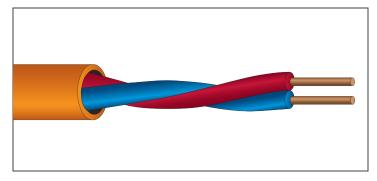

Description:

Two solid conductors, insulated with 45 mils of HD-PE. Cable jacketed with moisture resistant HD-PE jacket in various colors. Rip cord included for ease of stripping.

Application:

Suitable for use as ID wire.

Copper

ID Wire HD-PE



Standards:

ICEA S-61-402/NEMA WC-5 ICEA S-95-658/NEMA WC-70 Sunlight Resistant Direct Burial Color Code: Blue and Red RoHS Compliant

Part Number	Conductors (no.)	Strands (no.)	Insulation Thickness (mils)	Jacket Thickness (mils)	Diameter (in.)	Approx. Net Weight (lb./1000')
DECT14/2	2	1	45	35	0.38	54
DECT12/2	2	1	45	35	0.41	72
NOTE: The data shown is approximate and subject to standard industry tolerances.						

Culloden, WV 800-624-3572