


## ARMORED CABLE



## JACKETED MC RWU90/ACW90/ACWU90

1,000/2,000 Volt Copper  
3 Conductor

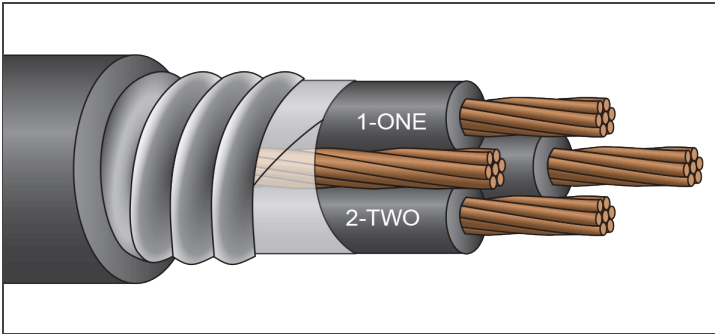

### Description:

Three copper conductors, stranded and insulated with heat and moisture resistant, chemically crosslinked polyethylene (*type RWU90*), phase identified and cabled together with suitable fillers and bare copper grounding conductor. Cable core covered with mylar binder tape and galvanized steel interlocked armour, with overall black PVC jacket. **Jacket available in colours. Available with ServiceCPE® jacket.**

### Application:

Suitable for use in industrial power distribution systems where continuity of service is the prime consideration. May be installed in wet or dry locations, directly buried, or encased in concrete. Suitable for use in cable tray.

Suitable for use in hazardous locations: Class I - Div 2, Class II - Div 2

### Standards:

UL 44, UL 854, and UL 1569  
ICEA S-95-658/NEMA WC-70

Flame Rated: IEEE 383 (*70,000 BTU*), ICEA T-29-520 (*210,000 BTU*),  
IEEE 1202/CSA FT-4, Two-hour Firewall

Temperature Rated at 90°C Wet /Dry

Cold Temperature Rated at -25°C

Sunlight and Oil Resistant II Jacket

Direct Burial (*includes encasement in concrete*)

Colour Code: Method 4 (*optional color codes available*)

RoHS Compliant

Part Number	Size (AWG or Kcmil)	Strand (no.)	Insulation Thickness (mils)	Grounding Conductor (AWG)	Diameter Over Armour (in.)	Jacket Thickness (mils)	Approx. Diameter Overall (in.)	Approx. Net Weight (lb./1000')	Ampacity* (30°C ambient)
GAP2K6/3	6	7	85	8	0.99	50	1.09	765	75
GAP2K4/3	4	7	85	6	1.09	50	1.19	975	95
GAP2K2/3	2	7	85	6	1.27	50	1.37	1,427	130
GAP2K1/3	1	7	105	6	1.41	50	1.51	1,718	145
GAP2K1/03	1/0	19	105	6	1.51	60	1.63	2,044	170
GAP2K2/03	2/0	19	105	6	1.61	60	1.73	2,432	195
GAP2K3/03	3/0	19	105	4	1.71	60	1.83	2,843	225
GAP2K4/03	4/0	19	105	4	1.85	60	1.97	3,358	260
GAP2K250/3	250	37	120	4	2.05	60	2.17	4,038	290
GAP2K350/3	350	37	120	3	2.27	75	2.42	5,240	350
GAP2K500/3	500	37	120	2	2.53	75	2.68	7,050	430
GAP2K750/3	750	61	135	1	3.01	85	3.18	10,093	535

\*Per NEC Table 310.15 (B)(16). NOTE: The data shown is approximate and subject to standard industry tolerances.