


ARMORED CABLES



JACKETED MC CONNECTOR Water Tight-GIA

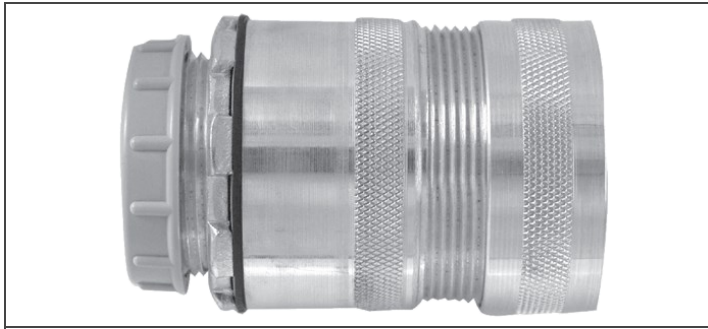

Description:

Connectors are a one-piece body construction with a unique scroll design that can provide a 360° ground to armor. Provides fast and easy installation, eliminates internal components, prevents cable pullout, and saves time and labor.

Application:

Suitable for industrial and commercial use. Manufactured from 6061 copper-free aluminum. A complete range of NPT (*National Pipe Thread*) sizes are available from 0.5" through 4". This accommodates armored cable type MC O.D. sizes from 0.38" through 4.33".

Standards:

Hazardous Locations: Class I (*Div 2*) and Class II/III (*all Divisions*)
IP Rating: WT Type 6P/IP68

Copper	Part	O.D.
GIA-PVC	Number	Range
6/3 GAP	CONW90	0.830 - 0.090
6/4 GAP	CONW97	0.900 - 0.970
4/3 GAP	CONW97	0.900 - 0.970
4/4 GAP	CONW104	0.970 - 1.040
3/3 GAP	CONW104	0.970 - 1.040
3/4 GAP	CONW111	1.040 - 1.110
2/3 GAP	CONW111	1.040 - 1.110
2/4 GAP	CONW118	1.110 - 1.180
1/3 GAP	CONW118	1.110 - 1.180
1/4 GAP	CONW139	1.320 - 1.390
1/03 GAP	CONW139	1.320 - 1.390
1/04 GAP	CONW148	1.390 - 1.480
2/03 GAP	CONW148	1.390 - 1.480
2/04 GAP	CONW157	1.480 - 1.570
3/03 GAP	CONW157	1.480 - 1.570
3/04 GAP	CONW175	1.660 - 1.750

Copper	Part	O.D.
GIA-PVC	Number	Range
4/03 GAP	CONW166	1.570 - 1.660
4/04 GAP	CONW184	1.750 - 1.840
250/3 GAP	CONW184	1.750 - 1.840
250/4 GAP	CONW213	2.020 - 2.130
300/3 GAP	CONW202	1.930 - 2.020
300/4 GAP	CONW224	2.130 - 2.240
350/3 GAP	CONW213	2.020 - 2.130
350/4 GAP	CONW235	2.240 - 2.350
400/3 GAP	CONW224	2.130 - 2.240
400/4 GAP	CONW246	2.350 - 2.460
500/3 GAP	CONW235	2.240 - 2.350
500/4 GAP	CONW271	2.570 - 2.710
600/3 GAP	CONW271	2.570 - 2.710
600/4 GAP	CONW299	2.850 - 2.990
750/3 GAP	CONW299	2.850 - 2.990
750/4 GAP	CONW328	3.130 - 3.280