


**SINGLE CONDUCTOR**

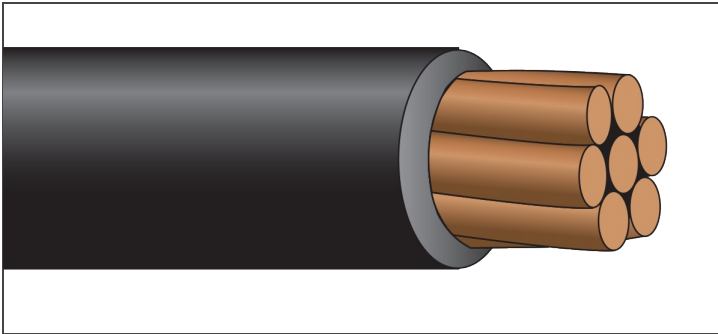

**SERVICESOLAR® (PV)**

**RHW-2**

1kV/2kV Copper

No Pulling Lubricant Required



**Description:**

Single copper conductor, stranded and insulated with moisture and heat resistant, chemically crosslinked polyethylene. Featuring ServicePRO-X® Insulation—No Pulling Lubricant Required (#6 AWG and larger). Rated 2kV to meet the challenging requirements of transformerless inverters on photovoltaic (solar) panel installations. **Available in colors.**

**Application:**

Suitable for use as interconnection wiring on solar panels in grounded or ungrounded systems as defined in applicable parts of the National Electrical Code (NEC) NFPA 70, such as article 690.31(A). Suitable for use in 105°C dry systems. Also suitable for use in low leakage circuits requiring a dielectric constant of 3.5 or less (Hospital Grade).

**Standards:**

ASTM Standards: B-3 (soft or annealed), B-8 (concentric lay stranded) B787 (combination strand)  
 UL 44 RHW-2, UL 854 USE-2, and UL 4703 PV Wire  
 C(UL) RPVU90 1kV/2kV: CSA C22.2 #271  
 ICEA S-95-658/NEMA WC-70  
 Federal Spec. A-A-59544  
 Flame Rated: Vertical Wire, CT Use (1/0 AWG and larger)  
 Temperature Rated at 90°C Wet/Dry, Cold Temperature Rated at -40°C  
 Sunlight Resistant, Gasoline and Oil Resistant II  
 Direct Burial  
 RoHS Compliant

Part Number	Size (AWG or Kcmil)	Strand (no.)	Insulation Thickness (mils)	Nominal Diameter Overall (in.)	Approx. Net Weight (lb./1000')	Ampacity* 90°C Wet/Dry
PV2K14BK	14	7	75	0.22	29	35†
PV2K14BK-C	14	19	75	0.22	29	35†
PV2K12BK	12	7	75	0.24	39	40†
PV2K12BK-C	12	19	75	0.24	39	40†
PV2K10BK	10	7	75	0.27	53	55†
PV2K10BK-C	10	19	75	0.27	53	55†
PV2K8BK	8	7	85	0.31	79	80
PV2K8BK-C	8	19	85	0.31	79	80
PV2K6BK	6	7	85	0.35	114	105
PV2K4BK	4	7	85	0.40	167	140
PV2K3BK	3	7	85	0.42	204	165
PV2K2BK	2	7	85	0.45	249	190
PV2K1BK	1	19	105	0.53	324	220
PV2K1/0BK	1/0	19	105	0.57	398	260
PV2K2/0BK	2/0	19	105	0.61	490	300
PV2K3/0BK	3/0	19	105	0.66	604	350
PV2K4/0BK	4/0	19	105	0.72	749	405
PV2K250BK	250	37	120	0.81	887	455
PV2K300BK	300	37	120	0.87	1,050	500
PV2K350BK	350	37	120	0.92	1,211	570
PV2K400BK	400	37	120	0.96	1,372	615
PV2K500BK	500	37	120	1.04	1,691	700
PV2K600BK	600	61	135	1.16	2,038	780
PV2K750BK	750	61	135	1.26	2,516	885

\*Based on ambient temperature of 30°C per NEC Table 310.15 (B)(17). †The overcurrent protection for items marked with an obelisk (†) shall not exceed 15 amps for #14 AWG, 20 amps for #12 AWG, and 30 amps for #10 AWG per NEC 310-17 footnote. NOTE: Photovoltaic module interconnection wire for use with or without a raceway in accordance with wiring systems Article 690 in the National Electrical Code (NEC), NFPA 70. NOTE: The data shown is approximate and subject to standard industry tolerances.