


**SERVICEDRIVE®**



**VFD TERMINATING  
CONNECTOR**  
**NPT Conduit (Tray)**  
2,000 Volt Copper

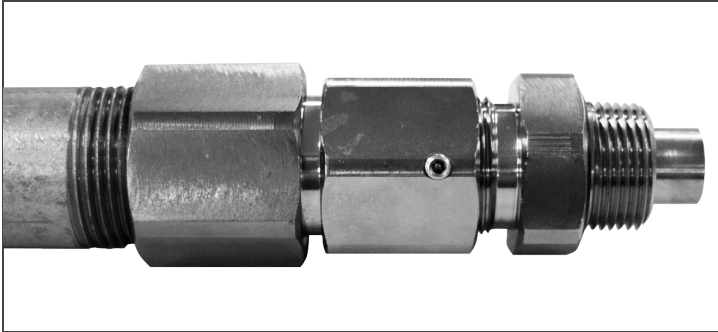

**Description:**

Patented connectors for conduit installations are designed exclusively to terminate VFD tray cables in control centers, panel boards, junction boxes, motors, and motor control enclosures. *Compatible with any NPT threaded conduit (including galvanized rigid, aluminum, PVC, or intermediate).*

**Application:**

\*Patented for use with ServiceDrive® Cable Systems

**Standards:**

UL: Class I (Div 2) and Class II/III (all Divisions)  
NEMA 4  
IP65  
Thread Type: NPT  
\*U.S. Patent No. 7,309,835

Part Number	3 Conductor Wire Size (AWG or Kcmil)	Hub Size	NPT Conduit Size	Set Screw Size
CONASDTC2K14/3CC	14	3/4"	1"	10/32 x 1/4"
CONASDTC2K12/3CC	12	3/4"	1"	10/32 x 1/4"
CONASDTC2K10/3CC	10	3/4"	1"	10/32 x 1/4"
CONASDTC2K8/3CC	8	3/4"	1-1/4"	10/32 x 1/4"
CONASDTC2K6/3CC	6	1"	1-1/4"	1/4-20 x 5/16"
CONASDTC2K4/3CC	4	1-1/4"	1-1/2"	1/4-20 x 5/16"
CONASDTC2K3/3CC	3	1-1/4"	1-1/2"	1/4-20 x 5/16"
CONASDTC2K2/3CC	2	1-1/4"	2"	1/4-20 x 5/16"
CONASDTC2K1/3CC	1	1-1/2"	2"	1/4-20 x 5/16"
CONASDTC2K1/03CC	1/0	1-1/2"	2"	1/4-20 x 5/16"
CONASDTC2K2/03CC	2/0	1-1/2"	2"	1/4-20 x 5/16"
CONASDTC2K3/03CC	3/0	1-1/2"	2-1/2"	5/16-18 x 3/8"
CONASDTC2K4/03CC	4/0	2"	2-1/2"	5/16-18 x 3/8"
CONASDTC2K250/3CC	250	2"	3"	5/16-18 x 3/8"
CONASDTC2K300/3CC	300	2"	3"	5/16-18 x 3/8"
CONASDTC2K350/3CC	350	2"	3"	5/16-18 x 3/8"
CONASDTC2K400/3CC	400	2-1/2"	3-1/2"	5/16-18 x 3/8"
CONASDTC2K500/3CC	500	2-1/2"	4"	5/16-18 x 3/8"
CONASDTC2K600/3CC	600	3"	4"	5/16-18 x 3/8"
CONASDTC2K750/3CC	750	3"	4"	5/16-18 x 3/8"