


**IRRIGATION CABLE**

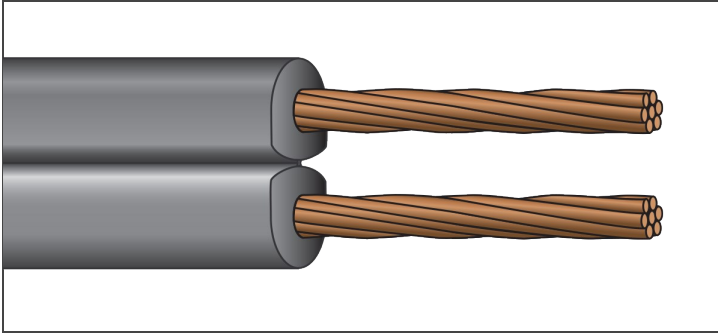

**LANDSCAPE LIGHTING**

**ULECC or LVLL**

30 Volt Copper



**Description:**

Extra flexible stranded copper conductors, configured flat and parallel with black PVC jacket. Conductors identified with ridges on the surface of the insulation.

**Application:**

Suitable for use in direct burial landscaping and lighting applications.

**Standards:**

ASTM Standards: B-174 (#16 AWG–#10 AWG), B-172 (#8 AWG)  
UL 1493

Temperature Rated at 60°C Wet/Dry

Sunlight Resistant, Gasoline and Oil Resistant

Direct Burial

RoHS Compliant

| Part Number | Conductor Stranded (AWG) | Conductor Strands (no.) | Dimensions Insulation (in.) | Dimensions O.D (in.) | Standard Packaging (100') | Standard Packaging (250') | Standard Packaging (500') | Standard Packaging (1000') | Weight (lb./1000') |
|-------------|--------------------------|-------------------------|-----------------------------|----------------------|---------------------------|---------------------------|---------------------------|----------------------------|--------------------|
| ULE16/2     | 16/2                     | 26                      | 0.045                       | 0.30 x 0.15          |                           |                           | X                         |                            | 34                 |
| ULE14/2     | 14/2                     | 41                      | 0.045                       | 0.33 x 0.16          | X                         |                           | X                         |                            | 46                 |
| ULE12/2     | 12/2                     | 65                      | 0.045                       | 0.30 x 0.18          | X                         | X                         | X                         | X                          | 64                 |
| ULE10/2     | 10/2                     | 104                     | 0.045                       | 0.41 x 0.21          | X                         | X                         | X                         | X                          | 91                 |
| ULE8/2      | 8/2                      | 168                     | 0.060                       | 0.53 x 0.26          | X                         |                           | X                         |                            | 147                |

*NOTE: The data shown is approximate and subject to standard industry tolerances.*