


SERVICEDRIVE®



VFD (TECK90) CONNECTOR

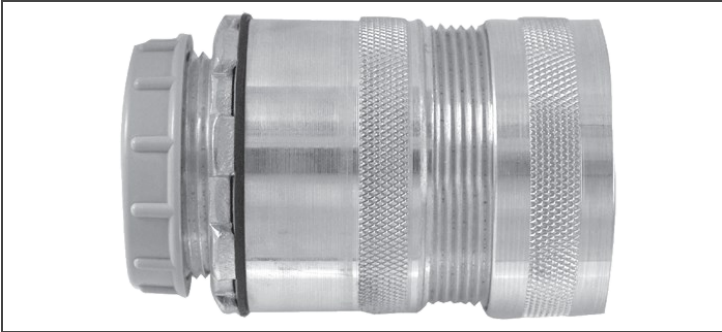

Description:

Connectors are a one-piece body construction with a unique scroll design that provides a 360° ground to armor.

Application:

Suitable for industrial and commercial use. Manufactured from 6061 copper-free aluminum. A complete range of NPT (*National Pipe Thread*) sizes are available from 0.5" through 4" to accommodate armored cable type MC O.D. sizes from 0.38" through 4.33".

Standards:

UL: Class I (*Div 2*) and Class II/III (*all Divisions*)

Item	Part Number	O.D. Range	Item	Part Number	O.D. Range
VFD2KCAAC14/3	CONW76	0.690 - 0.760	VFD2KCAAC2/03	CONW184	1.750 - 1.840
VFD2KCAAC12/3	CONW83	0.760 - 0.830	VFD2KCAAC3/03	CONW202	1.930 - 2.020
VFD2KCAAC10/3	CONW90	0.830 - 0.900	VFD2KCAAC4/03	CONW213	2.020 - 2.130
VFD2KCAAC8/3	CONW104	0.970 - 1.040	VFD2KCAAC250/3	CONW224	2.130 - 2.240
VFD2KCAAC6/3	CONW111	1.040 - 1.110	VFD2KCAAC300/3	CONW246	2.350 - 2.460
VFD2KCAAC4/3	CONW125	1.180 - 1.250	VFD2KCAAC350/3	CONW257	2.460 - 2.570
VFD2KCAAC3/3	CONW132	1.250 - 1.320	VFD2KCAAC400/3	CONW271	2.570 - 2.710
VFD2KCAAC2/3	CONW139	1.320 - 1.390	VFD2KCAAC500/3	CONW285	2.710 - 2.850
VFD2KCAAC1/3	CONW157	1.480 - 1.570	VFD2KCAAC600/3	CONW313	2.990 - 3.130
VFD2KCAAC1/03	CONW166	1.570 - 1.660	VFD2KCAAC750/3	CONW343	3.280 - 3.430