


TRAY & POWER CABLE

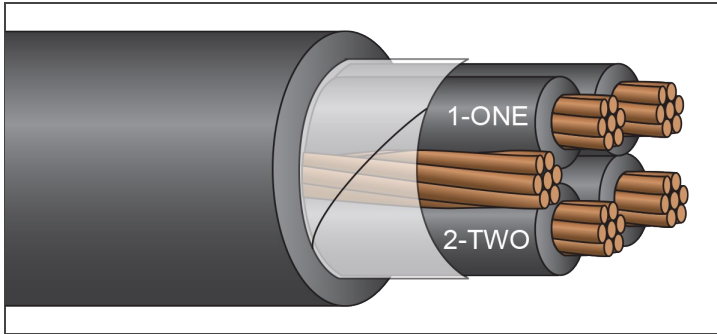

TRAY CABLE

XHHW-2 or RW90/ServiceCPE®

600/1,000 Volt Copper
4 Conductor



Description:

4 conductors, stranded, insulated with heat and moisture resistant crosslinked polyethylene (type XHHW-2 or RW90) and phase identified. Cabled with fillers (when necessary) and bare copper ground conductor. Cable core covered with binder tape and overall black CPE jacket. **Available with tinned conductors.**

Application:

Suitable for use in hazardous locations: Class I - Div 2, Class II - Div 2.

Standards:

UL 1277, CSA C22.2 #230 TC
ICEA S-95-658/NEMA WC-70
Exposed Runs Rated (TC-ER)
IMSA 19-1 (K-1 Colors)
Flame Rated: IEEE 383 (70,000 BTU),
T-29-520 (210,000 BTU) (available upon request),
IEEE 1202/CSA FT-4 (available upon request),
Two-hour Firewall
Temperature Rated at 90°C Wet/Dry
Sunlight Resistant, Gasoline and Oil Resistant I Jacket
Direct Burial
Color Code: Black and Numbered (#6 and larger)
K-2 Solid Colors (#14 AWG-#8 AWG)
(optional color codes available)
RoHS Compliant

Part Number	Size (AWG or Kcmil)	Strand (no.)	Insulation Thickness (mils)	Grounding Conductor (AWG)	Jacket Thickness (mils)	Approx. Diameter Overall (in.)	Approx. Net Weight (lb./1000')	Ampacity* (30°C ambient) 90°C Wet/Dry
TCCPE14/4G	14	7	30	14	45	0.41	116	25†
TCCPE12/4G	12	7	30	12	45	0.46	162	30†
TCCPE10/4G	10	7	30	10	45	0.51	231	40†
TCCPE8/4G	8	7	45	10	60	0.68	363	55
TCCPE6/4G	6	7	45	8	60	0.79	560	75
TCCPE4/4G	4	7	45	8	80	0.95	833	95
TCCPE3/4G	3	7	45	6	80	1.01	1,021	115
TCCPE2/4G	2	7	45	6	80	1.08	1,226	130
TCCPE1/4G	1	19	55	6	80	1.21	1,512	145
TCCPE1/04G	1/0	19	55	6	80	1.31	1,845	170
TCCPE2/04G	2/0	19	55	6	80	1.42	2,248	195
TCCPE3/04G	3/0	19	55	4	80	1.53	2,792	225
TCCPE4/04G	4/0	19	55	4	110	1.73	3,520	260
TCCPE250/4G	250	37	65	4	110	1.86	4,072	290
TCCPE350/4G	350	37	65	3	110	2.10	5,514	350
TCCPE500/4G	500	37	65	2	110	2.40	7,643	430
TCCPE600/4G	600	61	80	2	110	2.65	9,134	475
TCCPE750/4G	750	61	80	1	140	2.95	11,423	535
TCCPE1000/4G	1000	61	80	1/0	140	3.47	15,085	615

*Per NEC Table 310.15 (B)(16). Four-conductor ampacity assumes three are hot and one is neutral. †The overcurrent protection for items marked with an obelisk (†) shall not exceed 15 amps for #14 AWG, 20 amps for #12 AWG and 30 amps for #10 AWG per NEC 310-16 footnote. NOTE: The data shown is approximate and subject to standard industry tolerances.