


*IRRIGATION CABLE*



**DECODER CONTROL**  
**HD-PE Jacketed UF or TWU**  
Copper

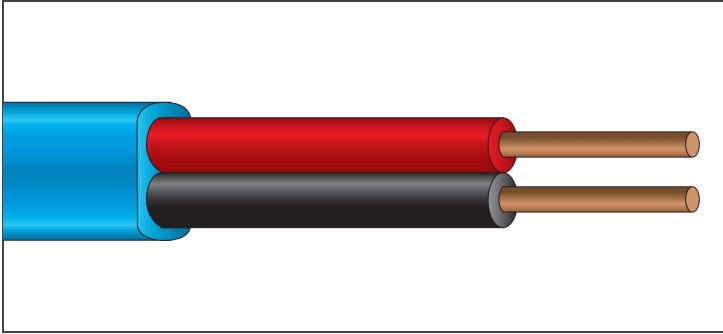

ISO 9001:2015



**Description:**

Two solid copper conductors, insulated with 60 mils of flame retardant PVC.  
Cable jacketed with moisture resistant HD-PE jacket in various colors.

**Application:**

Suitable for use in Irrigation Control Circuits.

**Standards:**

UL 493 (*conductors*)  
ICEA S-61-402/NEMA WC-5  
Sunlight Resistant  
Direct Burial  
Color Code: Black and Red  
RoHS Compliant

Part Number	Conductors (no.)	Strands (no.)	Insulation Thickness (mils)	Jacket Thickness (mils)	Diameter (in.)	Approx. Net Weight (lb./1000')
DEC 14/2	2	1	60	35	0.25 x 0.44	72
DEC 12/2	2	1	60	35	0.27 x 0.47	92

*NOTE: The data shown is approximate and subject to standard industry tolerances.*