


## ARMORED CABLE

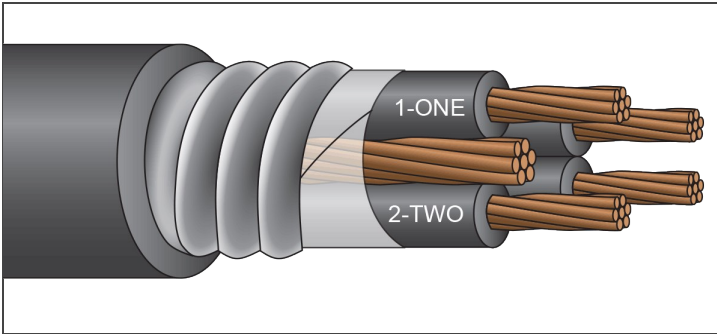

## JACKETED MC

### XHHW-2/EnviroPlus®

600 Volt Copper, LSZH Jacket  
4 Conductor, Factory Mutual Group 1



### Description:

4 conductors, stranded, insulated with heat and moisture resistant crosslinked polyethylene (type XHHW-2), phase identified and cabled with suitable fillers (as necessary) and bare copper ground conductor. Cable core is covered with binder tape and aluminum or galvanized steel interlocked armor, with zero halogen, low smoke, zero lead jacket. **Available with tinned conductors.**

### Application:

Suitable for use in hazardous locations: Class I - Div 2, Class II - Div 2.

### Standards:

UL1569  
ICEA S-95-658/NEMA WC-70  
Flame Rated: IEEE 383 (70,000 BTU), IEEE 1202/CSA FT-4,  
UL 1685 and UL 1581, Two-hour Firewall  
Temperature Rated at 90°C Wet/Dry, Cold Temperature Rated at -40°C  
Sunlight Resistant  
Direct Burial (includes encasement in concrete)  
Color Code: Black and Numbered  
K-2 Solid Colors (#8 AWG)  
(optional color codes available)  
Zero Halogen, Low Smoke Jacket  
RoHS Compliant

Part Number	Size (AWG or Kcmil)	Strand (no.)	Insulation Thickness (mils)	Grounding Conductor (AWG)	Diameter Over Armor (in.)	Jacket Thickness (mils)	Approx. Diameter Overall (in.)	Approx. Net Weight Aluminum Armor (lb./1000')	Approx. Net Weight Galvanized Armor (lb./1000')	Ampacity* (30°C ambient) 90°C Wet/Dry
AANH8/4	8	7	45	10	0.79	50	0.89	485	579	55
AANH6/4	6	7	45	8	0.87	50	0.97	663	775	75
AANH4/4	4	7	45	8	0.99	50	1.09	907	1,040	95
AANH3/4	3	7	45	6	1.05	50	1.15	1,099	1,242	115
AANH2/4	2	7	45	6	1.13	50	1.23	1,305	1,452	130
AANH1/4	1	19	55	6	1.33	50	1.43	1,624	1,872	145
AANH1/04	1/0	19	55	6	1.43	50	1.53	1,956	2,227	170
AANH2/04	2/0	19	55	6	1.51	60	1.63	2,381	2,681	195
AANH3/04	3/0	19	55	4	1.65	60	1.77	2,935	3,256	225
AANH4/04	4/0	19	55	4	1.79	60	1.91	3,560	3,925	260
AANH250/4	250	37	65	4	1.91	60	2.03	4,209	4,601	290
AANH350/4	350	37	65	3	2.17	60	2.29	5,665	6,118	350
AANH500/4	500	37	65	2	2.45	75	2.60	7,873	8,390	430
AANH600/4	600	61	80	2	2.71	75	2.86	9,377	9,943	475
AANH750/4	750	61	80	1	2.97	85	3.12	11,513	12,128	535
AANH1000/4	1000	61	80	1/0	3.49	85	3.66	15,232	15,966	615

\*Per NEC Table 310.15 (B)(16). Four-conductor ampacity assumes three are hot and one is neutral. NOTE: The data shown is approximate and subject to standard industry tolerances.