


*IRRIGATION CABLE*



**UNDERGROUND FEEDER**  
**Golf Course Sprinkler - PE**  
600 Volt Copper

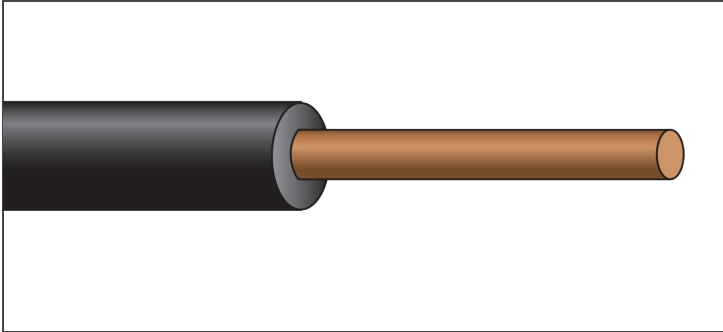

**Description:**

Solid annealed copper conductor insulated with polyethylene.

**Application:**

Suitable for use as sprinkler irrigation control wire for general purpose lighting, power and control conductors for irrigation systems. For use in accordance per NEC Article 339.

**Standards:**

UL 493  
UL Type ULECC  
Temperature Rated at 75°C Wet/Dry  
Cold Temperature Rated at -40°C  
Acid, Alkali, Grease, Chemical, Abrasion, Crush and Moisture Resistant  
Direct Burial  
RoHS Compliant

| Part Number | Conductor (AWG) | Dimensions Insulation (in.) | Dimensions O.D. (in.) | Standard Packaging (2500') | Weight (lb./1000') |
|-------------|-----------------|-----------------------------|-----------------------|----------------------------|--------------------|
| GOLF14      | 14 (sol)        | 0.045                       | 0.15                  | X                          | 19                 |
| GOLF12      | 12 (sol)        | 0.045                       | 0.17                  | X                          | 27                 |
| GOLF10      | 10 (sol)        | 0.045                       | 0.19                  | X                          | 44                 |

*NOTE: The data shown is approximate and subject to standard industry tolerances.*