


## ARMORED CABLE



## JACKETED MC RWU90/ACW90/ACWU90

1,000/2,000 Volt Copper  
4 Conductor

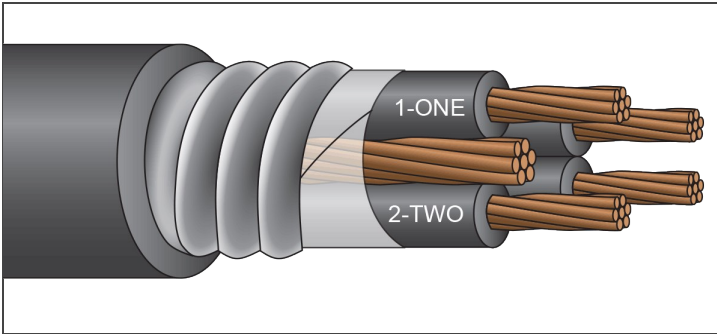

### Description:

4 Conductors, stranded, insulated with heat and moisture resistant crosslinked polyethylene (type RWU90), phase identified and cabled with suitable fillers and bare copper grounding conductor. Cable core covered with binder tape and galvanized steel interlocked armour, with black PVC jacket. **Jacket available in colours. Available with ServiceCPE® jacket.**

### Application:

Suitable for use in industrial power distribution systems where continuity of service is the prime consideration. May be installed in wet or dry locations, directly buried or encased in concrete. Suitable for use in cable tray.

Suitable for use in hazardous locations: Class I - Div 2, Class II - Div 2

### Standards:

UL 44, UL 854 and UL 1569  
ICEA S-95-658/NEMA WC-70  
Flame Rated: IEEE 383 (70,000 BTU), ICEA T-29-520 (210,000 BTU),  
IEEE 1202/CSA FT-4, Two-hour Firewall  
Temperature Rated at 90°C Wet/Dry  
Cold Temperature Rated at -25°C  
Sunlight and Oil Resistant II Jacket  
Direct Burial (includes encasement in concrete)  
Colour Code: Method 4  
RoHS Compliant

Part Number	Size (AWG or Kcmil)	Strand (no.)	Insulation Thickness (mils)	Grounding Conductor (AWG)	Diameter Over Armour (in.)	PVC Jacket Thickness (mils)	Approx. Diameter Overall (in.)	Approx. Net Weight (lb./1000')	Ampacity* (30°C ambient)
GAP2K6/4	6	7	85	8	1.07	50	1.17	924	75
GAP2K4/4	4	7	85	8	1.23	50	1.33	1,195	95
GAP2K2/4	2	7	85	6	1.37	50	1.47	1,737	130
GAP2K1/4	1	7	105	6	1.57	60	1.69	2,152	145
GAP2K1/04	1/0	19	105	6	1.67	60	1.79	2,531	170
GAP2K2/04	2/0	19	105	4	1.79	60	1.91	3,036	195
GAP2K3/04	3/0	19	105	4	1.89	60	2.01	3,554	225
GAP2K4/04	4/0	19	105	4	2.03	60	2.15	4,231	260
GAP2K250/4	250	37	120	4	2.25	60	2.37	5,090	290
GAP2K350/4	350	37	120	3	2.53	75	2.68	6,717	350
GAP2K500/4	500	37	120	2	2.85	75	3.00	9,006	430
GAP2K750/4	750	61	135	1	3.33	85	3.50	12,903	535

\*Per NEC Table 310.15 (B)(16). Four-conductor ampacity assumes three are hot and one is neutral. NOTE: The data shown is approximate and subject to standard industry tolerances.