


## ARMORED CABLE

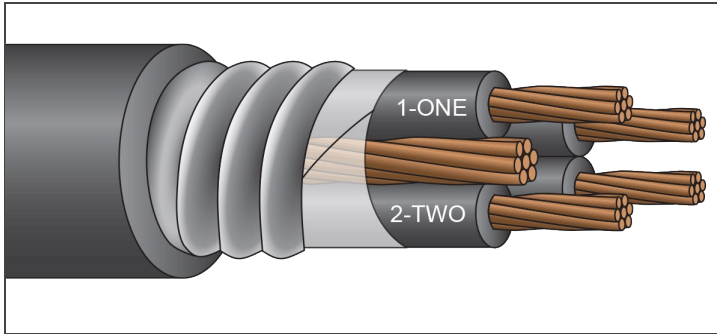

## JACKETED MC

### ACW90/ACWU90, 50% Ground

600 Volt Copper  
4 Conductor



### Description:

4 conductors, stranded, insulated with heat and moisture resistant crosslinked polyethylene (*type RW90*), phase identified and cabled with suitable fillers (*when necessary*) and bare copper ground conductor (*3 segmented grounds*). Cable core covered with binder tape and galvanized steel interlocked armour, with black PVC jacket. **Jacket available in colours.**

### Application:

Suitable for use in hazardous locations: Class I - Div 2, Class II - Div 2

### Standards:

UL 1569  
ICEA S-95-658/NEMA WC-70  
Flame Rated: CT Use, IEEE 383 (70,000 BTU), ICEA T-29-520 (210,000 BTU), IEEE 1202/CSA FT-4, Two-hour Firewall  
Temperature Rated at 90°C Wet/Dry  
Cold Temperature Rated at -25°C  
Sunlight and Oil Resistant II Jacket  
Direct Burial (*includes encasement in concrete*)  
Color Code: Method 4 (*K2 on #8; other color codes available*)  
RoHS Compliant

Part Number	Size (AWG or Kcmil)	Strand (no.)	Insulation Thickness (mils)	Grounding Conductors (AWG)	Diameter Over Armour (in.)	PVC Jacket Thickness (mils)	Approx. Diameter Overall (in.)	Approx. Net Weight (lb/1000')	Ampacity* (30°C ambient) 90°C Wet/Dry
GAP6/4G3#12	6	7	45	3-#12	0.87	50	0.97	778	75
GAP4/4G3#10	4	7	45	3-#10	0.99	50	1.09	1,077	95
GAP3/4G3#10	3	7	45	3-#10	1.05	50	1.15	1,248	115
GAP2/4G3#8	2	7	45	3-#8	1.13	50	1.23	1,515	130
GAP1/4G3#8	1	19	55	3-#8	1.33	50	1.43	1,933	145
GAP1/04G3#6	1/0	19	55	3-#6	1.43	50	1.53	2,379	170
GAP2/04G3#6	2/0	19	55	3-#6	1.51	60	1.63	2,829	195
GAP3/04G3#4	3/0	19	55	3-#4	1.65	60	1.77	3,500	225
GAP4/04G3#4	4/0	19	55	3-#4	1.79	60	1.91	4,167	260
GAP250/4G3#4	250	37	65	3-#4	1.99	60	2.11	4,883	290
GAP300/4G3#3	300	37	65	3-#3	2.13	60	2.25	5,743	320
GAP350/4G3#2	350	37	65	3-#2	2.25	75	2.40	6,667	350
GAP400/4G3#2	400	37	65	3-#2	2.35	75	2.50	7,381	380
GAP500/4G3#1	500	37	65	3-#1	2.53	75	2.68	8,984	430
GAP600/4G3-1/0	600	61	80	3-1/0	2.85	75	3.00	10,795	475
GAP750/4G3-2/0	750	61	80	3-2/0	3.05	85	3.22	13,209	535
GAP1000/4G3-3/0	1000	61	80	3-3/0	3.49	85	3.66	17,096	615

\*Per NEC Table 310.15 (B)(16). Four-conductor ampacity assumes three are hot and one is neutral. NOTE: The data shown is approximate and subject to standard industry tolerances.