


**SUBMERSIBLE PUMP CABLE**



**FLAT YELLOW  
THW  
600 Volt Copper**

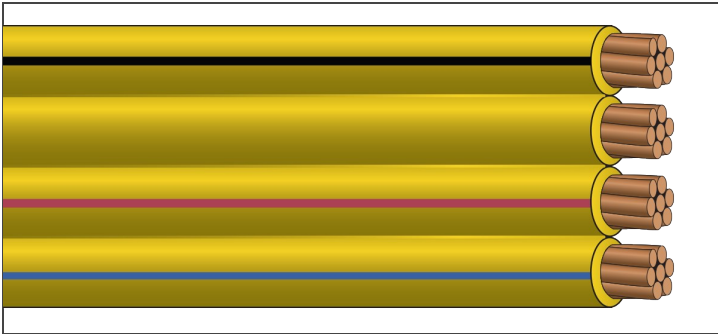

**Description:**

Stranded copper conductors are insulated with yellow PVC (type THW) and bonded together with yellow insulated ground, configured flat and parallel with no overall jacket.

**Application:**

Suitable for use within the well casing to supply power to the pump and where flexibility during installation and operation are required.

**Standards:**

UL 83 and UL 1581  
Temperature Rated at 75°C Wet/Dry  
Sunlight Resistant, Gasoline and Oil Resistant  
Color Code: K-2 Stripes  
RoHS Compliant

Part Number	Conductor Size Power (AWG)	Conductor Size Ground (AWG)	Dimensions Insulation (in.)	Dimensions O.D. (in.)	Standard Packaging (500')	Standard Packaging (1,000')	Ampacity NEC\$	Weight (lb./1000')
PYW14/2GG	14/2 (7 str)	14 (7 str)	0.045	0.17 x 0.53	X	X	15	69
PYW12/2GG	12/2 (7 str)	12 (7 str)	0.045	0.19 x 0.57	X	X	20	96
PYW10/2GG	10/2 (7 str)	10 (7 str)	0.045	0.21 x 0.66	X	X	30	138
PYW8/2GG	8/2 (7 str)	8 (7 str)	0.060	0.27 x 0.79	X	X	50	210
PYW6/2GG	6/2 (7 str)	6 (7 str)	0.060	0.31 x 0.92	X	X	65	401
PYW14/3GG	14/3 (7 str)	14 (7 str)	0.045	0.17 x 0.72	X	X	15	91
PYW12/3GG	12/3 (7 str)	12 (7 str)	0.045	0.19 x 0.75	X	X	20	128
PYW10/3GG	10/3 (7 str)	10 (7 str)	0.045	0.21 x 0.84	X	X	30	184
PYW8/3GG	8/3 (7 str)	10 (7 str)	0.060	0.27 x 1.06	X	X	50	269
PYW6/3GG	6/3 (7 str)	8 (7 str)	0.060	0.31 x 1.23	X	X	65	401
PYW4/3GG	4/3 (7 str)	8 (7 str)	0.060	0.35 x 1.32			85	561

§Per NEC Table 310.15 (B)(16). NOTE: The data shown is approximate and subject to standard industry tolerances.