


BARE COPPER



PLATER WIRE

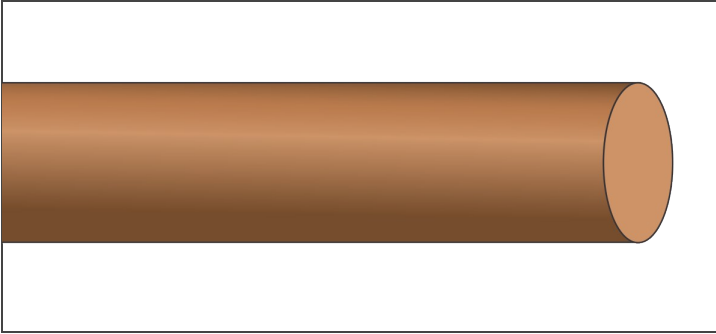

Description:

Solid soft drawn or hard drawn bare copper.
 Packaged on convenient spools (*per ASTM B49*).

Soft Drawn: Easily formed into place.

Hard Drawn: Higher tensile strength. Retains Shape. More difficult to form.

Application:

Suitable for use as a hanger in the electro-plating industry. Highest conductivity per unit area of all commercially available metals used to conduct electricity.
 Easily welded and soldered.

Standards:

ASTM Standards: B-1 (*hard drawn*), B-3 (*soft or annealed*), B-49 (*copper rod*)
 RoHS Compliant

Part Number	Solid Conductor (AWG)	Approximate (ft./lb.)	Standard Put-up Per Carton	Standard Packaging	Weight (lb./1000')
PLATER24	24	818	6 x 10 lb. Spools	60	1.2
PLATER22	22	514	6 x 10 lb. Spools	60	1.9
PLATER20	20	323	6 x 10 lb. Spools	60	3.1
PLATER16	16	128	6 x 10 lb. Spools	60	7.8
PLATER14	14	81	2 x 25 lb. Spools	50	12.4
PLATER12	12	51	2 x 25 lb. Spools	50	19.8
PLATER10	10	32	2 x 25 lb. Spools	50	31.4
PLATER8	8	20	2 x 25 lb. Spools	50	50.0
PLATER6	6	13	2 x 25 lb. Spools	50	79.4
PLATER4	4	8	2 x 25 lb. Spools	50	126.3
PLATER2	2	5	2 x 25 lb. Spools	50	200.9

NOTE: The data shown is approximate and subject to standard industry tolerances.