


SERVICEDRIVE®

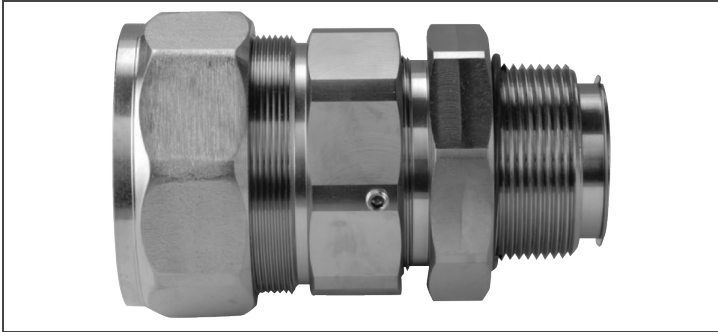

VFD CONNECTOR (TRAY)

2,000 Volt Copper

Patented for use with ServiceDrive®/ServiceDrive Plus® Cable Systems



ISO 9001:2015



RoHS
COMPLIANT



Made in the
USA



REACH
COMPLIANCE



Encompass
Product Partner

Description:

Patented connectors are designed exclusively to terminate ASD/VFD cables in control centers, panel boards, junction boxes and motor control enclosures.

Standards:

Class I - Div 2, Class II - Div 1 and 2

NEMA 4

IP65

Thread Type: NPT

Part Number	3 Conductor Wire Size (AWG or Kcmil)	Hub Size	Set Screw Size
CONASDTC2K14/3	14	3/4"	10/32 x 1/4"
CONASDTC2K12/3	12	3/4"	10/32 x 1/4"
CONASDTC2K10/3	10	3/4"	10/32 x 1/4"
CONASDTC2K8/3	8	3/4"	10/32 x 1/4"
CONASDTC2K6/3	6	1 "	1/4-20 x 1/4"
CONASDTC2K4/3	4	1-1/4"	1/4-20 x 1/4"
CONASDTC2K3/3	3	1-1/4"	1/4-20 x 1/4"
CONASDTC2K2/3	2	1-1/4"	1/4-20 x 1/4"
CONASDTC2K1/3	1	1-1/2"	1/4-20 x 1/4"
CONASDTC2K1/03	1/0	1-1/2"	1/4-20 x 1/4"
CONASDTC2K2/03	2/0	1-1/2"	1/4-20 x 5/16"
CONASDTC2K3/03	3/0	1-1/2"	1/4-20 x 5/16"
CONASDTC2K4/03	4/0	2"	1/4-20 x 5/16"
CONASDTC2K250/3	250	2"	5/16-18 x 3/8"
CONASDTC2K300/3	300	2"	5/16-18 x 3/8"
CONASDTC2K350/3	350	2"	5/16-18 x 3/8"
CONASDTC2K400/3	400	2-1/2"	5/16-18 x 3/8"
CONASDTC2K500/3	500	2-1/2"	5/16-18 x 3/8"
CONASDTC2K600/3	600	3"	5/16-18 x 3/8"
CONASDTC2K750/3	750	3"	5/16-18 x 3/8"