


SERVICEDRIVE®

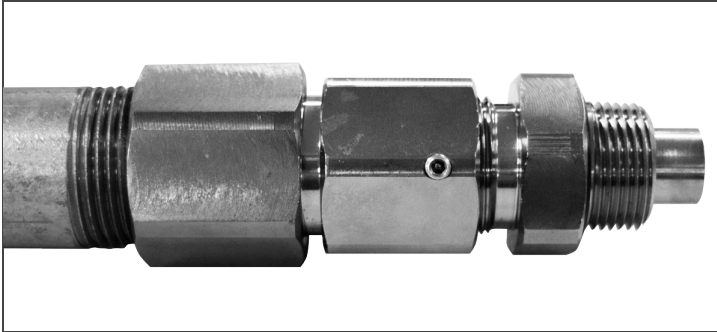

VFD NPT CONNECTOR

Self-Terminating

2,000 Volt Copper

**Patented for use with ServiceDrive® Cable Systems*



Description:

Patented connectors for conduit installations are designed exclusively to terminate VFD cables in control centers, panel boards, junction boxes, and motor control enclosures.

Standards:

Class I - Div 2, Class II - Div 1 and 2

NEMA 4

IP65

Thread Type: NPT

**U.S. Patent No. 7,309,835*

Part Number	Coupling Part Number	3 Conductor Wire Size (AWG or Kcmil)	Hub Size	NPT Conduit Size	Set Screw Size
CONASDTC2K14/3	CONCP14-10-1.00	14	3/4"	1"	10/32 x 1/4"
CONASDTC2K12/3	CONCP14-10-1.00	12	3/4"	1"	10/32 x 1/4"
CONASDTC2K10/3	CONCP14-10-1.00	10	3/4"	1"	10/32 x 1/4"
CONASDTC2K8/3	CONCP8-6-1.25	8	3/4"	1-1/4"	10/32 x 1/4"
CONASDTC2K6/3	CONCP8-6-1.25	6	1"	1-1/4"	1/4-20 x 5/16"
CONASDTC2K4/3	CONCP4-3-1.50	4	1-1/4"	1-1/2"	1/4-20 x 5/16"
CONASDTC2K3/3	CONCP4-3-1.50	3	1-1/4"	1-1/2"	1/4-20 x 5/16"
CONASDTC2K2/3	CONCP2-2.00	2	1-1/4"	2"	1/4-20 x 5/16"
CONASDTC2K1/3	CONCP1-1/0-2.00	1	1-1/2"	2"	1/4-20 x 5/16"
CONASDTC2K1/03	CONCP1-1/0-2.00	1/0	1-1/2"	2"	1/4-20 x 5/16"
CONASDTC2K2/03	CONCP2/0-2.00	2/0	1-1/2"	2"	1/4-20 x 5/16"
CONASDTC2K3/03	CONCP3/0-4/0-2.50	3/0	1-1/2"	2-1/2"	5/16-18 x 3/8"
CONASDTC2K4/03	CONCP3/0-4/0-2.50	4/0	2"	2-1/2"	5/16-18 x 3/8"
CONASDTC2K250/3	CONCP250-350-3.00	250	2"	3"	5/16-18 x 3/8"
CONASDTC2K300/3	CONCP250-350-3.00	300	2"	3"	5/16-18 x 3/8"
CONASDTC2K350/3	CONCP250-350-3.00	350	2"	3"	5/16-18 x 3/8"
CONASDTC2K400/3	CONCP400-3.50	400	2-1/2"	3-1/2"	5/16-18 x 3/8"
CONASDTC2K500/3	CONCP500-4.0	500	2-1/2"	4"	5/16-18 x 3/8"
CONASDTC2K600/3	CONCP600-750-4.0	600	3"	4"	5/16-18 x 3/8"
CONASDTC2K750/3	CONCP600-750-4.0	750	3"	4"	5/16-18 x 3/8"