


**IRRIGATION CABLE**



**SPRINKLER CONTROL**

30 Volt Copper

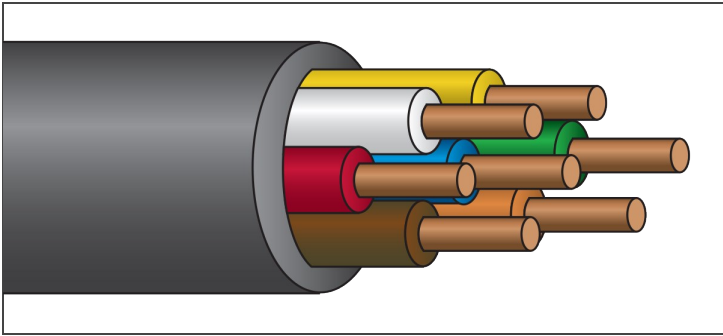

**Description:**

Soft annealed solid copper, insulated with colored PVC, cabled with and jacketed with black HMW-PE (*nylon rip cord under jacket*).

**Application:**

Suitable for use as control cable for commercial and residential irrigation systems.

**Standards:**

UL Listed: Sprinkler Control Cable  
Temperature Rated at 60°C Wet/Dry  
Acid, Alkali, Grease, Chemical, Abrasion, Crush,  
Moisture and Sunlight Resistant  
Underground Use  
RoHS Compliant

Part Number	Conductor Solid (AWG)	Conductor Solid (no.)	Dimensions Insulation (in.)	Dimensions Jacket (in.)	Dimensions O.D. (in.)	Standard Packaging (100')	Standard Packaging (250')	Standard Packaging (500')	Standard Packaging (1000')	Weight (lb./1000')
SPR18/2	18	2	0.02	0.03	0.14 x 0.22		X	X	X	23
SPR18/3	18	3	0.02	0.03	0.23	X	X	X	X	30
SPR18/4	18	4	0.02	0.03	0.25			X		38
SPR18/5	18	5	0.02	0.03	0.27	X	X	X	X	47
SPR18/6	18	6	0.02	0.03	0.30			X		55
SPR18/7	18	7	0.02	0.03	0.30	X	X	X	X	62
SPR18/8	18	8	0.02	0.03	0.33		X	X		71
SPR18/9	18	9	0.02	0.03	0.35					79
SPR18/10	18	10	0.02	0.03	0.37	X	X	X	X	87
SPR18/12	18	12	0.02	0.03	0.39					103
SPR18/13	18	13	0.02	0.03	0.40		X	X	X	110

*NOTE: The data shown is approximate and subject to standard industry tolerances.*