


IRRIGATION CABLE



SPRINKLER CONTROL

30 Volt Copper

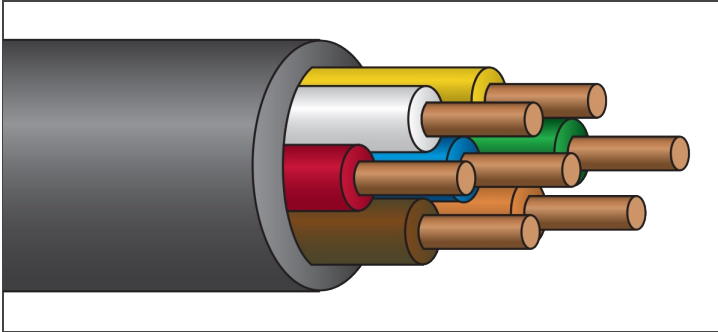

Description:

Soft annealed solid copper, insulated with colored PVC, cabled with and jacketed with black HMW-PE (*nylon rip cord under jacket*).

Application:

Suitable for use as control cable for commercial and residential irrigation systems.

Standards:

UL Listed: Sprinkler Control Cable
Temperature Rated at 60°C Wet/Dry
Acid, Alkali, Grease, Chemical, Abrasion, Crush,
Moisture and Sunlight Resistant
Underground Use
RoHS Compliant

Part Number	Conductor Solid (AWG)	Conductor Solid (no.)	Dimensions Insulation (in.)	Dimensions Jacket (in.)	Dimensions O.D. (in.)	Standard Packaging (100')	Standard Packaging (250')	Standard Packaging (500')	Standard Packaging (1000')	Weight (lb./1000')
SPR18/2	18	2	0.02	0.03	0.14 x 0.22		X	X	X	23
SPR18/3	18	3	0.02	0.03	0.23	X	X	X	X	30
SPR18/4	18	4	0.02	0.03	0.25			X		38
SPR18/5	18	5	0.02	0.03	0.27	X	X	X	X	47
SPR18/6	18	6	0.02	0.03	0.30			X		55
SPR18/7	18	7	0.02	0.03	0.30	X	X	X	X	62
SPR18/8	18	8	0.02	0.03	0.33		X	X		71
SPR18/9	18	9	0.02	0.03	0.35					79
SPR18/10	18	10	0.02	0.03	0.37	X	X	X	X	87
SPR18/12	18	12	0.02	0.03	0.39					103
SPR18/13	18	13	0.02	0.03	0.40		X	X	X	110

NOTE: The data shown is approximate and subject to standard industry tolerances.