


**SERVICEDRIVE®**



**VFD TERMINATING CONNECTOR**  
**Liquidtight (Tray)**  
2,000 Volt Copper

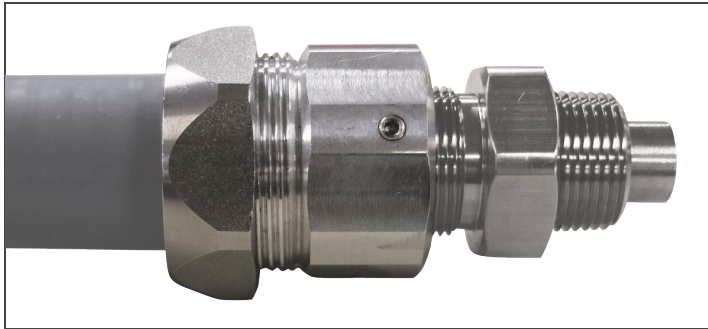

**Description:**

Patented connectors for liquidtight installations are designed exclusively to terminate VFD tray cables in control centers, panel boards, junction boxes, motors, and motor control enclosures. *Compatible with liquidtight conduit.*

**Application:**

\*Patented for use with ServiceDrive® Cable Systems

**Standards:**

Hazardous Locations: Class I (Div 2) and Class II/III (all Divisions)  
NEMA 4  
IP65  
Thread Type: NPT

\*U.S. Patent No. 11,018,447

| Part Number       | 3 Conductor Wire Size (AWG or Kcmil) | Hub Size | Liquidtight Conduit Size | Set Screw Size |
|-------------------|--------------------------------------|----------|--------------------------|----------------|
| CONASDTC2K14/3LT  | 14                                   | 3/4"     | 1"                       | 10/32 x 1/4"   |
| CONASDTC2K12/3LT  | 12                                   | 3/4"     | 1"                       | 10/32 x 1/4"   |
| CONASDTC2K10/3LT  | 10                                   | 3/4"     | 1"                       | 10/32 x 1/4"   |
| CONASDTC2K8/3LT   | 8                                    | 3/4"     | 1-1/4"                   | 10/32 x 1/4"   |
| CONASDTC2K6/3LT   | 6                                    | 1"       | 1-1/4"                   | 1/4-20 x 5/16" |
| CONASDTC2K4/3LT   | 4                                    | 1-1/4"   | 1-1/2"                   | 1/4-20 x 5/16" |
| CONASDTC2K3/3LT   | 3                                    | 1-1/4"   | 1-1/2"                   | 1/4-20 x 5/16" |
| CONASDTC2K2/3LT   | 2                                    | 1-1/4"   | 2"                       | 1/4-20 x 5/16" |
| CONASDTC2K1/3LT   | 1                                    | 1-1/2"   | 2"                       | 1/4-20 x 5/16" |
| CONASDTC2K1/03LT  | 1/0                                  | 1-1/2"   | 2"                       | 1/4-20 x 5/16" |
| CONASDTC2K2/03LT  | 2/0                                  | 1-1/2"   | 2"                       | 1/4-20 x 5/16" |
| CONASDTC2K3/03LT  | 3/0                                  | 1-1/2"   | 2-1/2"                   | 5/16-18 x 3/8" |
| CONASDTC2K4/03LT  | 4/0                                  | 2"       | 2-1/2"                   | 5/16-18 x 3/8" |
| CONASDTC2K250/3LT | 250                                  | 2"       | 3"                       | 5/16-18 x 3/8" |
| CONASDTC2K300/3LT | 300                                  | 2"       | 3"                       | 5/16-18 x 3/8" |
| CONASDTC2K350/3LT | 350                                  | 2"       | 3"                       | 5/16-18 x 3/8" |
| CONASDTC2K400/3LT | 400                                  | 2-1/2"   | 3-1/2"                   | 5/16-18 x 3/8" |
| CONASDTC2K500/3LT | 500                                  | 2-1/2"   | 4"                       | 5/16-18 x 3/8" |
| CONASDTC2K600/3LT | 600                                  | 3"       | 4"                       | 5/16-18 x 3/8" |
| CONASDTC2K750/3LT | 750                                  | 3"       | 4"                       | 5/16-18 x 3/8" |