


*IRRIGATION CABLE*



**UNDERGROUND FEEDER**  
**Golf Course Sprinkler - PE**  
600 Volt Copper

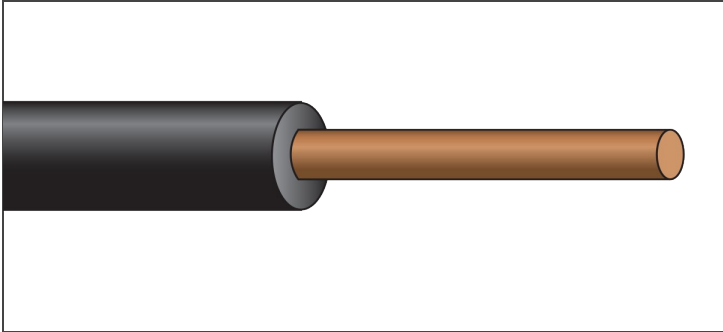

**Description:**

Solid annealed copper conductor insulated with polyethylene.

**Application:**

Suitable for use as sprinkler irrigation control wire for general purpose lighting, power and control conductors for irrigation systems. For use in accordance per NEC Article 339.

**Standards:**

UL 493  
UL Type ULECC  
Temperature Rated at 75°C Wet/Dry  
Cold Temperature Rated at -40°C  
Acid, Alkali, Grease, Chemical, Abrasion, Crush and Moisture Resistant  
Direct Burial  
RoHS Compliant

Part Number	Conductor (AWG)	Dimensions Insulation (in.)	Dimensions O.D. (in.)	Standard Packaging (2500')	Weight (lb./1000')
GOLF14	14 (sol)	0.045	0.15	X	19
GOLF12	12 (sol)	0.045	0.17	X	27
GOLF10	10 (sol)	0.045	0.19	X	44

*NOTE: The data shown is approximate and subject to standard industry tolerances.*